
Shielded Deep Groove Ball Bearings



ZE Shield



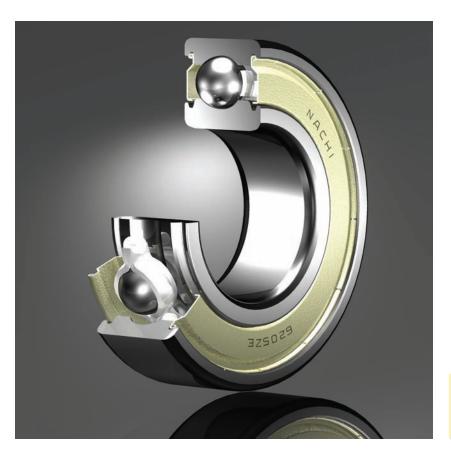

- L-Shaped Shield Plate
- U-Shaped Seal Groove

Advanced Shield Design Provides Superior Protection and Quiet Operation

The shield design was optimized using finite element analysis and dynamic analysis modeling techniques.

The design profile and plate thickness provides rigidity that helps quiet operation as well as retain grease and protect against intrusion of major contamination.

Superior in Sealing Out ContaminationSuperb Grease RetentionQuiet Operation

The Best Components Yield the Greatest Bearing Performance

Rings and balls made of select material have superbly controlled accuracy such as roundness, contour, surface finish, and hardness to provide quieter operation, reduced vibration levels, and long life.

Rivet-type pressed steel cages for strength and durability.


High-performance grease for long life and low noise.

Technical Information

Comparison Test Results

Nachi vs. Other Brands

Grease Leakage

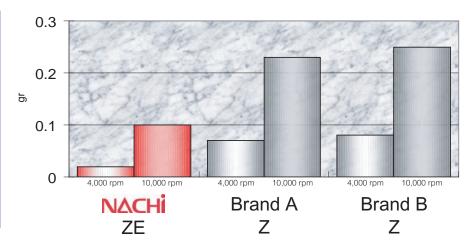

Tested Bearing: 6203ZZE Inner Ring Rotation, No Load Ambient Temperature = 80 °C Test Duration = 20 hours

NACHI ZE shield showed the best performance for retaining grease under both conditions.

Design Comparison







Brand A



Brand B Z

Offices

NACHI AMERICA, INC. Corporate Headquarters

715 Pushville Road Greenwood, Indiana 46143 Phone: 317-530-1001 Fax: 317-530-1011

WEST COAST BRANCH

12652 Alondra Boulevard Cerritos, CA 90703 Phone: 800-548-3903 Fax: 562-802-2455

BEARING DIV. HEADQUARTERS

715 Pushville Road Greenwood, Indiana 46143 Phone: 317-530-1002 Fax: 317-530-1012

ENGINEERING LABORATORY Nachi Technical Center

715 Pushville Road Greenwood, IN 46143 Phone: 317-530-1008 Fax: 317-530-1012



CATALOG NO.: NAB 0601-1 October 2011